

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup>:</b> <b>H01J 61/18</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 98/45872</b> <b>(43) International Publication Date:</b> 15 October 1998 (15.10.98)
<b>(21) International Application Number:</b> PCT/IB98/00324 <b>(22) International Filing Date:</b> 12 March 1998 (12.03.98)  <b>(30) Priority Data:</b> 97201043.3 9 April 1997 (09.04.97) EP <b>(34) Countries for which the regional or international application was filed:</b> NL et al.  <b>(71) Applicant:</b> KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).  <b>(71) Applicant (for SE only):</b> PHILIPS NORDEN AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE).  <b>(72) Inventors:</b> WUENBERG, Christoffel; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). SEINEN, Peter, Arend; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).  <b>(74) Agent:</b> DUSSELDORP, Jan, C.; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).		<b>(81) Designated States:</b> CA, CN, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
<b>(54) Title:</b> METAL HALIDE LAMP  <b>(57) Abstract</b> <p>The invention relates to a metal halide lamp which radiates light with a color temperature <math>T_c</math> of between 3900 K and 4200 K and with a general color rendering index <math>R_a \geq 90</math>. The ionizable metal halide filling comprises between 30 and 50 mole % <math>\text{CaI}_2</math>. A lamp can be realized thereby having a limited crest factor, and accordingly a long useful life.</p> <div data-bbox="532 1171 1201 1480"></div>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Metal halide lamp.

The invention relates to a metal halide lamp provided with a discharge vessel with a ceramic wall which encloses a discharge space containing an ionizable filling which comprises besides Hg a molar quantity of halides of Na, Tl and at least one of the elements Dy and Ho.

5

A lamp of the kind mentioned in the opening paragraph is known from EP-A-0 215 521 (PHN 11.485). The known lamp, which combines a high luminous efficacy with excellent color properties (among them general color rendering index  $R_a \geq 80$  and  
10 color temperature  $T_c$  between 2600 and 4000 K) is highly suitable for use as a light source for inter alia interior lighting.

In this lamp, the recognition is utilized that a good color rendering is possible when Na halide is used as a filling ingredient of a lamp, and that a strong widening and inversion of the Na emission in the Na-D lines occurs during lamp operation. This  
15 requires a high temperature of the coldest spot  $T_{cs}$  in the discharge vessel of, for example, 1170 K (900 °C). When the Na-D lines are inverted and widened, they assume the shape of an emission band in the spectrum with two maxima at a mutual distance  $\Delta\lambda$ .

The requirement that  $T_{cs}$  should have a high value excludes under practical circumstances the use of quartz or quartz glass for the discharge vessel wall, and  
20 necessitates the use of a ceramic material for the discharge vessel wall.

A ceramic wall in the present description and claims is understood to be a wall made from metal oxide, such as, for example, sapphire or densely sintered polycrystalline  $Al_2O_3$ , as well as from metal nitride, for example AlN.

The known lamp has a good color rendering and also a comparatively  
25 wide range for the color temperature.

In general, the known lamp is operated on an AC voltage supply source with a frequency of no more than 120 Hz. The discharge will be extinguished and subsequently be re-ignited in the lamp, once this has been ignited, upon each polarity change in the supply voltage. This re-ignition takes place at a voltage level, called re-ignition voltage

hereinafter, which is higher than the stable arc voltage of the lamp. The ratio of the re-ignition voltage to the arc voltage is called crest factor. The crest factor assumes a comparatively high value in particular when the lamp is operated on a sinusoidal signal. The crest factor usually increases in value during lamp life. The lamp will not re-ignite anymore and remain off when the crest factor assumes a too high value. The required quantity of metal halide is found to lead to very high initial values for the crest factor and to a fast rise thereof through lamp life when a lamp having a color temperature  $T_c$  in the range between 3900 K and 4500 K is realized. This adversely affects lamp life.

It is an object of the invention to provide a lamp of the kind described in the opening paragraph in which a long useful life can be realized.

According to the invention, this object is achieved in that the ionizable filling of the lamp also comprises  $\text{CaI}_2$  in a molar quantity which lies between 30 and 50% of the total molar quantity of the halides.

The lamp according to the invention has the advantage that the crest factor value remains limited also after some thousands of burning hours have elapsed, while it is surprisingly found that the excellent color properties of the lamp are hardly influenced, while also the luminous efficacy of the lamp is not adversely affected. No effective reduction of the crest factor can be found for a molar quantity of the  $\text{CaI}_2$  below 30 mole%. When the molar quantity exceeds 50 mole%, on the other hand, a further reduction of the crest factor is indeed achieved, but at the same time the luminous efficacy of the lamp is substantially impaired. An implementation of the measure that the ionizable filling comprises besides halides of Dy and Ho also a halide of Tm has the advantage that an existing manufacturing technology can be used.

Limitation of the molar quantity of Tl halide to between 3 and 10% of the total molar quantity of halides has the advantage that the light radiated by the lamp has a color point which lies close to the blackbody line, said blackbody line being the geometrical locus or set of the color points of Planckian radiators. An additional advantage is that a small increase in the value of the general color rendering index  $R_a$  is realized thereby. A desired high value for the color temperature  $T_c$  can be realized at a total molar quantity of rare earth halides of Dy, Ho, and Tm which lies between 15 and 25 mole% of the total molar quantity of halides. Preferably, the ratio of the molar quantity of the Na halide to the molar quantity of rare earth halides is at most 2 in order to realize the desired color properties.

It is preferably realized by means of the measure according to the invention that the crest factor of the lamp according to the invention is below 2.3. This renders the lamp suitable as a retrofit lamp for existing lighting installations. Values for the crest factor above 2.3 gave the result that the lamp cannot be reliably operated in an existing  
5 installation.

The above and further aspects of the lamp according to the invention will be explained in more detail with reference to a drawing (not true to scale), in which:

10 Fig. 1 diagrammatically shows a lamp according to the invention, and  
Fig. 2 shows the discharge vessel of the lamp of Fig. 1 in detail.

Fig. 1 shows a metal halide lamp provided with a discharge vessel 3 with  
15 a ceramic wall which encloses a discharge space 11 containing an ionizable filling which comprises besides Hg a molar quantity of halides of Na, Tl, and Dy. Two electrodes whose tips have an interspacing EA are arranged in the discharge space, and the discharge vessel has an inner diameter Di at least at the area of the interspacing EA. The discharge vessel is closed off at one end by means of a projecting ceramic plug 34, 35 which encloses with a  
20 narrow intervening space a current lead-through conductor (Fig. 2: 40, 41, 50, 51) to a respective electrode 4, 5 positioned in the discharge vessel, and is connected to said electrode in a gastight manner at a side facing away from the discharge space by means of a melting-ceramic seal (Fig. 2: 10). The discharge vessel is surrounded by an outer bulb 1 which is provided with a lamp cap 2 at an end. A discharge extends between the electrodes 4 and 5  
25 when the lamp is in the operating state. The electrode 4 is connected via a current conductor 8 to a first electrical contact which forms part of the lamp cap 2. The electrode 5 is connected via a current conductor 9 to a second electrical contact which forms part of the lamp cap 2. The discharge vessel, shown in more detail in Fig. 2 (not true to scale), has a ceramic wall and is formed by a cylindrical portion with an inner diameter Di bounded on  
30 either side by end wall portions 32a, 32b having a mutual distance L, each end wall portion 32a, 32b defining an end face 33a, 33b of the discharge space. The end wall portions each have an opening in which a projecting ceramic plug 34, 35 is fastened in the end wall portion 32a, 32b in a gastight manner by means of a sintered joint S. The projecting ceramic plugs 34, 35 each narrowly enclose a current lead-through conductor 40, 41, 50, 51 of a respective

electrode 4, 5 having a tip 4b, 5b. The current lead-through conductor is connected to the projecting ceramic plug 34, 35 in a gastight manner by means of a melting-ceramic connection 10 at the side facing away from the discharge space.

The electrode tips 4b, 5b are situated at a mutual distance EA. The  
5 current lead-through conductors each have a respective portion 41, 51, for example in the form of a Mo-Al<sub>2</sub>O<sub>3</sub> cermet, which is highly resistant to halides, and a portion 40, 50 which is fastened to a respective end plug 34, 35 in a gastight manner by means of the melting-ceramic connection 10. The melting-ceramic connection extends over a certain distance, for example approximately 1 mm, over the respective Mo cermet 41, 51. It is possible for the  
10 components 41, 51 to be formed in a manner other than from a Mo-Al<sub>2</sub>O<sub>3</sub> cermet. Other possible constructions are known, for example, from EP-0 587 238 (US-A-5,424,609). A particularly suitable construction was found to be a highly halide-resistant coil wound around a similarly resistant pin. Mo is highly suitable as the material which is highly resistant to halides. The components 40, 50 consist of a metal whose coefficient of expansion  
15 corresponds very well to that of the end plugs. Nb, for example, is for this purpose a highly suitable material. The components 40, 50 are connected to the respective current conductors 8, 9 in a manner which is not shown in any detail. The lead-through construction described renders it possible to operate the lamp in any burning position.

Each electrode 4, 5 consists of an electrode rod 4a, 5a which is provided  
20 with a coiling 4c, 5c adjacent its tip 4b, 5b. The projecting ceramic plugs are fastened in the end wall portions 32a, 32b in a gastight manner by means of a sintered joint S. The electrode tips here lie between the end faces 33a, 33b formed by the end wall portions. In an alternative embodiment of a lamp according to the invention, the projecting ceramic plugs 34, 35 are recessed relative to the end wall portions 32a, 32b. The electrode tips in that case  
25 lie substantially in the end faces 33a, 33b formed by the end wall portions.

In a practical realization of a lamp according to the invention as described with reference to the drawing, the rated lamp power is 70 W and the luminous efficacy is 88 lm/W. The lamp, which is suitable for operation on an existing installation (retrofit lamp), has a lamp voltage of 91 V. The ionizable filling of the discharge vessel comprises 6 mg Hg, and 8 mg iodide salts as the molar quantity of halides of Na, Tl, Dy, Ho, Tm, and Ca  
30 having respective molar percentages of 29%, 6.5%, 6.5%, 6.5%, 6.5% and 45%. The Hg, which also serves to ensure that lamp voltage will be between 80 V and 100 V, which is necessary to comply with the retrofit requirement, has a pressure of 20 bar when the lamp is in the operational state. The filling further comprises Ar with a filling pressure of 140 mbar

as an ignition gas.

The distance EA between the electrode tips is 6 mm, the distance L between the end faces is 8 mm, and the internal diameter Di is 7.4 mm.

Photometric properties of the lamp were measured in an endurance test. The results are as follows. The crest factor in the case of operation by means of a supply source of 220 V, 50 Hz is 1.8 after 100 burning hours, 1.9 after 1000 burning hours, 2.05 after 2000 burning hours, and 2.07 after 5000 burning hours. The color temperature  $T_c$  is 4214 K, 4222 K, 4260 K, and 4255 K at the moments of 100, 1000, 2000, and 4000 burning hours. The color point has the following co-ordinates at these moments (x,y): (0,370;0,365), (0,371;0,369), (0,369;0,368) and (0,370;0,369). The general color rendering index  $R_a$  has a value of 92 after 100 burning hours. This value is 91 after 4000 burning hours.

In another practical realization of the lamp according to the invention, the rated lamp power is 39 W and the luminous efficacy is 90 lm/W. The ionizable filling of the discharge vessel comprises 3.3 mg Hg and 6 mg halide salts of the same composition as in the 70 W lamp described above. The lamp radiates light with a color temperature  $T_c$  of 4019 K and with a general color rendering index  $R_a$  of 90 in the operational state. The crest factor is 2.1 during operation on a public 220 V, 50 Hz mains.

In a further practical realization, the lamp with a power rating of 150 W has an ionizable filling of 7.6 mg Hg and 9 mg iodide salts of Na, Tl, Ho, and Ca in respective relative quantities of 41.5 mole%, 6.5 mole%, 22 mole%, and 30 mole%. The distance EA between the electrode tip in the discharge vessel is 11 mm, the distance L between the end faces is 14 mm, and the internal diameter Di is 9.2 mm. The luminous efficacy is 85 lm/W during operation, the crest factor is 2.07, the color temperature  $T_c$  is 4208 K, and the general color rendering index  $R_a$  is 94.

## CLAIMS:

1. A metal halide lamp provided with a discharge vessel with a ceramic wall which encloses a discharge space containing an ionizable filling which comprises besides Hg a molar quantity of halides of Na, Tl and at least one of the elements Dy and Ho, characterized in that the ionizable filling of the lamp also comprises  $\text{CaI}_2$  in a molar quantity  
5 which lies between 30 and 50% of the total molar quantity of the halides.
2. A lamp as claimed in claim 1, characterized in that the ionizable filling comprises besides halides of Dy and Ho also a halide of Tm.
3. A lamp as claimed in claim 1 or 2, characterized in that the total molar quantity of halides of Dy, Ho and Tm lies between 15 and 25% of the total molar quantity of  
10 the halides.
4. A lamp as claimed in claim 1, 2 or 3, characterized in that the molar quantity of Tl halide lies between 3 and 10% of the total molar quantity of the halides.
5. A lamp as claimed in claim 1, 2 or 3, characterized in that the ratio of the molar quantity of the Na halide to the molar quantity of the halides of Dy, Ho and Tl  
15 together has a value of at most 2.



1/1

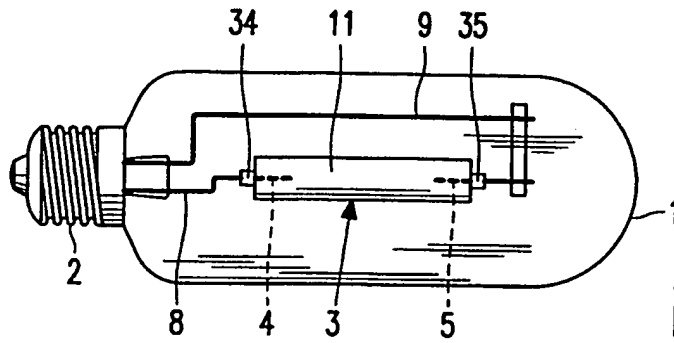


FIG. 1

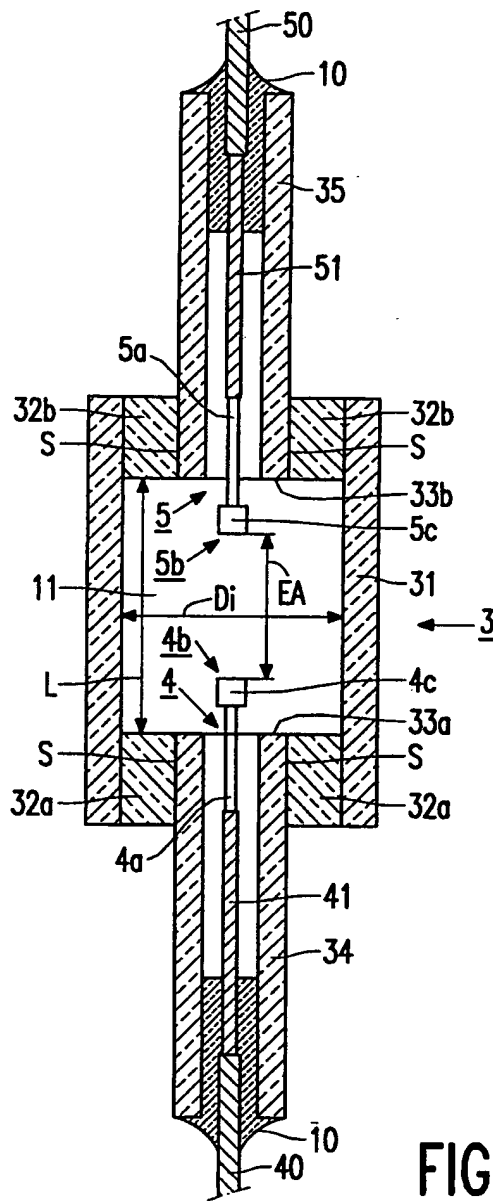


FIG. 2

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 98/00324

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H01J 61/18

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3852630 A (G.A. WESSELINK ET AL.), 3 December 1974 (03.12.74), column 3, line 25 - column 4, line 23; column 4, line 32 - line 50, claims 1,5,7  --	1-5
A	US 4020377 A (H-P POPP ET AL.), 26 April 1977 (26.04.77), column 1, line 59 - column 2, line 14  --	1-5
A	US 3558963 A (R.E. HANNEMAN ET AL.), 26 January 1971 (26.01.71), column 3, line 64 - line 75  --	1-5

☒ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

- \* Special categories of cited documents:
- "A" document defining the general state of the art which is not considered to be of particular relevance
  - "E" earlier document but published on or after the international filing date
  - "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
  - "O" document referring to an oral disclosure, use, exhibition or other means
  - "P" document published prior to the international filing date but later than the priority date claimed
  - "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
  - "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
  - "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
  - "&" document member of the same patent family

Date of the actual completion of the international search

3 Sept 1998

Date of mailing of the international search report

10-09-1998

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Tomas Erlandsson  
Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 98/00324

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5239232 A (J. HEIDER ET AL.), 24 August 1993 (24.08.93), column 3, line 59 - column 4, line 43  -- -----	1-5

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

27/07/98

International application No.

PCT/IB 98/00324

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3852630 A	03/12/74	AR 196519 A	06/02/74
		AT 325149 B	10/10/75
		AU 5338973 A	19/09/74
		BE 797013 A	19/09/73
		CA 964324 A	11/03/75
		CH 563066 A	13/06/75
		DE 2307631 A	04/10/73
		FR 2176814 A,B	02/11/73
		GB 1400976 A	16/07/75
		JP 49013988 A	06/02/74
		NL 7203720 A	24/09/73
		SE 377983 B,C	04/08/75
US 4020377 A	26/04/77	DE 2519377 A	11/11/76
		FR 2309974 A,B	26/11/76
		GB 1539429 A	31/01/79
US 3558963 A	26/01/71	BE 737098 A	16/01/70
		BR 6911235 D	00/00/00
		DE 1941519 A	17/09/70
		FR 2016955 A	15/05/70
		GB 1252829 A	10/11/71
		JP 49015014 B	11/04/74
US 5239232 A	24/08/93	DE 4013039 A	31/10/91
		DE 59106003 D	00/00/00
		EP 0453893 A,B	30/10/91
		JP 4230946 A	19/08/92